








Spec Sheet: Stainless Steel Drop Coupling (DCS)

Features

- Durable and strong
- Available 1", 1-1/4", 1-1/2", 2"

Technical Requirements

- The surface of the parts should not have scratches, bruises and other damage to the surface defects of the parts.
- Remove burrs, sharp edges, and blunt edges.
- No chamfer $C \leq 0.5$.
- Dimension tolerance according to ISO 8062 CT8.

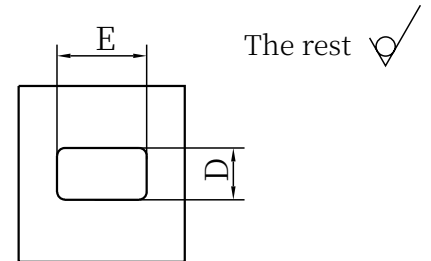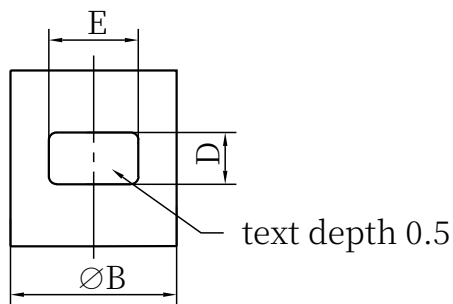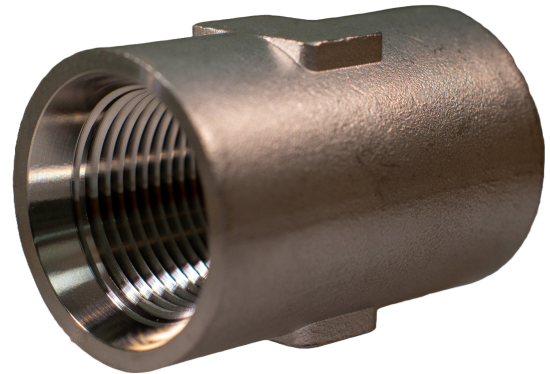

Item No.	SIZE	$\phi A \pm 0.15$	B	C	D	E	$L \pm 0.18$	NPT
DCS-10	1"	36.8	42.3	43.0	15.8	24.0	63.0	1" -11.5
DCS-12	1-1/4"	42	54	55	18	25	60	1-1/4" -11.5
DCS-15	1-1/2"	57	50	57	18	25	60	-11.5 1-1/2"
DCS-20	2"	65	60	70	18	35	60	-11.5 2"

Casting System of Linear Dimensional Tolerances ISO 8062 (GB/T 6414)										
Tolerances	Nominal Dimension									
	0~10	>10~16	>16~25	>25~40	>40~63	>63~100	>100~160	>160~250	>250~400	>400~630
CT8	±0.5	±0.55	±0.6	±0.65	±0.7	±0.8	±0.9	±1.0	±1.1	±1.3