




Spec Sheet: 1-1/4" Brass Full-Circle Impact Sprinkler (I125)

Features

- 25° trajectory
- Double nozzle
- Full circle coverage
- Stainless steel parts
- Diffuser pin assembly

Operating Range

- Pressure 65-100 PSI
- GPM 40-73
- Highest point of stream - 9ft. above nozzle level

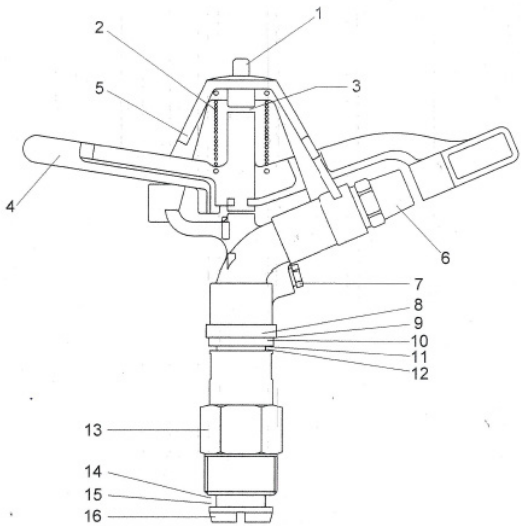

No.	Parts	No.	Parts
1	Fulcrum Pin	9	Pressure Spring
2	Arm Spring	10	Lower Hood Washer
3	Arm Washer	11	Brass Washer
4	Arm	12	Teflon Washer
5	Body	13	Sleeve Assembly
6	Main Nozzle	14	Washer Rubber
7	Lower Nozzle	15	Thrust Washer
8	Upper Hood Washer	16	Bearing Nipple

Specifications

Nozzle	3/8" X 7/32"		13/32" X 7/32"		7/16" X 1/4"	
	RADIUS	GPM	RADIUS	GPM	RADIUS	GPM
65	88	43.5	91	48.6	93	58
70	90	44.9	92	50.4	95	60.3
75	91	46.7	94	52.4	96	62.7
80	93	48.3	95	54.3	98	64.8
85	94	49.8	97	56	99	67
90	96	51.4	98	57.9	101	69
95	97	53	99	59.6	102	70
100	98	54.5	100	61.2	103	73

