




Spec Sheet: Pressure Gauge with Gas Mount (PGL)

Models

- PG15L (Counts in 5's)
- PG30L (Counts in 5's)
- PG60L (Counts in 10's)
- PG100L (Counts in 10's)
- PG160L (Counts in 20's)
- PG200L (Counts in 20's)
- PG300L (Counts in 50's)
- PG400L (Counts in 50's)
- PG600L (Counts in 100's)

Specifications

- Dial Size: 2" (50mm) or 4" (100mm)
- Case: Stainless Steel
- Liquid: Glycerine
- Wetted Parts: Copper Alloy
- Bezel: Crimped Stainless Steel
- Lens: Polycarbonate Window
- Socket and Connection: Copper Alloy
- Movement: Copper Alloy
- Bourdon Tube: Brass
- Pointer and Dial: Aluminum Finish
- Connection: 2" dial = 1/8" NPT or 1/4" NPT 4" dial = 1/4" NPT or 1/2" NPT
- Scale: Single Scale PSI
- Accuracy: 3-2-3% of Span, ASME Grade B
- Ambient Temperature: -20-60C

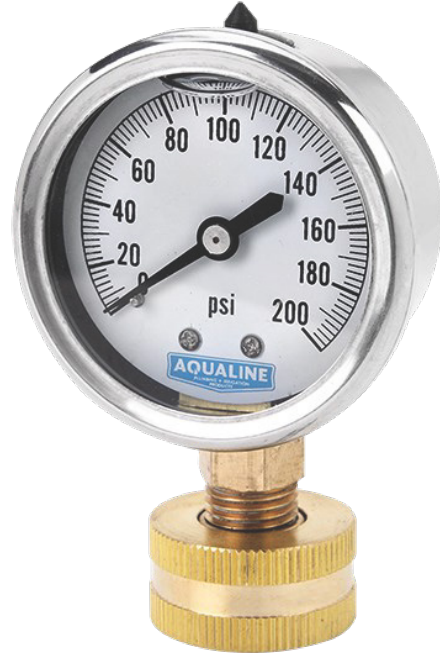

*Swivel not included

Application

- Used for pneumatic systems, compressors, and compressed air systems
- Suitable for fluid medium which does not clog connection port or brass
- Used for providing protection from vibration and pulsation.



WARNING: This product can expose you to chemicals including Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov
Wash hands after handling.