

Spec Sheet: Stainless Steel Union (SU)


Features

- · Easy to install and remove
- Low maintenance
- · Versatile and durable
- · Available in a variety of sizes

Dimensions (mm)

ITEM	SIZE	ZE SW L±1		М	
SU-018	1/8"	28.5	36.5	14.5	
SU-014	1/4" 28.5 36.5		14.5		
SU-038	3/8"	35.5	37.0	14.5	
SU-050	1/2"	39.0	41.5	14.5	
SU-075	3/4"	46.5	45.5	15.0	
SU-100	1"	56.0	50.0	17.5	
SU-125	1-1/4"	66.5	51.5	19.0	
SU-150	1-1/2"	74.5	57.0	21.0	
SU-200	2"	2" 90.0		24.0	
SU-250	2-1/2"	107.5	73.0	24.0	
SU-300	3"	125.0	89.5	28.0	
SU-400	4"	155.0	99.5	33.0	



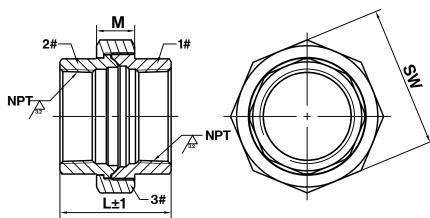

PRESSURE & TEMPERATURE RATING						
Temperature °F (°C)	Class 150,PSIG					
-20 to 150 (-29 to 66)	300					
200(93)	265					
250 (121)	225					
300(149)	185					
350(177)	150					

	Linea	ar dimens	sional to	lerances	for cas	stings IS	SO 8062	(GB/T 64	14)	
Limit deviation	Basic size segment									
	0~10	>10~16	>16~25	$>25 \sim 40$	>40~63	>63~100	>100~160	>160~250	>250~400	>400~630
CT8	±0.5	±0.55	±0.6	±0.65	±0.7	±0.8	±0.9	±1.0	±1.1	±1.3



WARNING: This product can expose you to chemicals including Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov Wash hands after handling.