




Spec Sheet: 1/2" Brass Impact Sprinkler (I50)

Features

- Twenty-five degree trajectory
- Brass body with white bronze arm
- Single nozzle
- Full circle coverage
- Highest point of spray is 5' above nozzle
- Multiple nozzle sizes available

Operating Range

- Pressure 25 to 60 PSI
- GPM 2.80 to 7.70
- Spacing 30' to 43' radius
- Nozzle sizes available: 1/8", 3/16", 5/32", 7/64", 9/64", 11/64"

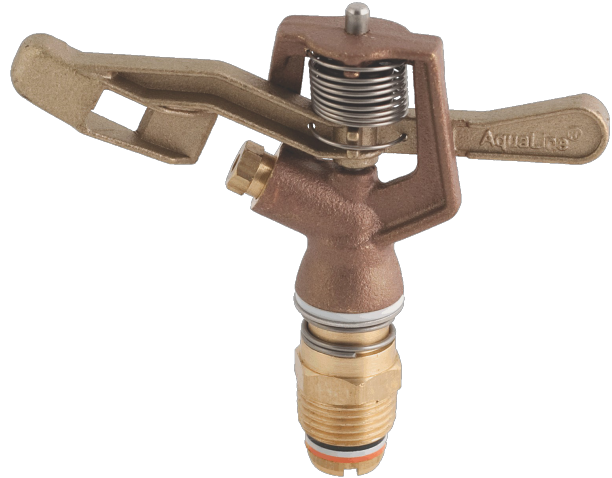

Models

- I50 Impact Sprinkler with no nozzle
- I50-332 Impact Sprinkler with 3/32 nozzle
- I50-764 Impact Sprinkler with 7/64 nozzle
- I50-018 Impact Sprinkler with 1/8 nozzle
- I50-964 Impact Sprinkler with 9/64 nozzle
- I50-532 Impact Sprinkler with 5/32 nozzle

Specifications

PSI	3/32"		5/32"		7/64"		9/64"		1/8"		GPM
	DIAM	GPM	DIAM	GPM	DIAM	GPM	DIAM	GPM	DIAM		4.5
25	-	-	74	3.4	-	-	74	2.8	75		4.6
30	26	1.4	75	3.8	26	1.9	75	3.1	75		4.8
35	28	1.5	77	4.1	28	2.1	76	3.4	76		4.9
40	29	1.6	78	4.4	29	2.2	77	3.7	76		5.3
45	30	1.7	79	4.7	30	2.3	78	3.9	78		5.4
50	31	1.8	80	5.0	32	2.4	79	4.1	79		6.0
55	32	1.9	81	5.2	33	2.6	80	4.2	81		6.2
60	33	2.0	82	5.4	34	2.7	80	4.3	82		



WARNING: This product can expose you to chemicals including Lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to: www.P65Warnings.ca.gov
Wash hands after handling.